



Model: ACWC-036-Q-RF¹-__²-__³-__⁴

Description:

Single stage air-cooled water chiller system. System capacity indicated on table is the approximate BTU/hr based on a leaving fluid temperature of 50°F with an ambient air temperature of 95°F.

CAPACITY ±5% AT 50° LCWT / 95°F AMBIENT		36,000 BTU /HR					
COMPRESSOR / REFRIGERANT		HERMETIC SCROLL / R410A					
CONDENSER FANS / AIRFLOW		1 / 2898 CFM					
CONDENSER COILS TYPE		COPPER TUBE / ALUMINUM FIN					
EVAPORATOR TYPE		STAINLESS STEEL / COPPER BRAZED					
FLUID CONNECTIONS		1 1/4" MNPT (IN) / 1" MNPT (OUT)					
ELECTRICAL:	V - Ø - HZ	COMP RLA / LRA	FAN FLA	PUMP FLA	MCA	MOCP	
- 2	230 - 1 - 60	15.4	83.9	1.3	6.6	27.1	40
- 5	230 - 3 - 60	10.4	73	1.3	3.4	17.7	25
- 6	460 - 3 - 60	5.8	38	0.5	1.7	9.4	15
PUMP HP / OUTPUT		1.0 HP / 30 GPM @ 30 PSI					
DIMENSIONS		42" L x 32 1/2" W x 52 1/2" H					
WEIGHT (APPROX.)		571 LBS					

Note: All specifications subject to change without notice. Specify voltage and ambient condition upon ordering.

MCA: Minimum circuit amps per UL 1995. MOCP: Maximum overcurrent protective device per UL 1995.

STANDARD FEATURES:

- **Controls:** Electronic programmed temperature controller with constant (set point & process) temperature readout.
- **Refrigeration Components:** Efficient scroll compressors, sight glass/moisture indicators, balanced port expansion valves, filter drier, pump down valves, fan cycling head pressure controls.
- **Process Fluid Components:** Bronze "Y" strainer with 20 mesh stainless steel screen. Pumps are stainless steel centrifugal.
- **Safety Controls:** High and low refrigerant pressure, high and low fluid temperature, freeze, low water flow, overloads for compressor and fan motors, safety fuses or overloads for pump.
- **Construction:** Welded steel powder coated frame and full metal cabinet, copper piping connections.
- **Warranty:** One year parts / five year compressor.

SUITABLE AMBIENT CONDITIONS/FEATURES:

- **IND:** Indoor use only. Casters on frame.
- **40:** Suitable for outdoor use with an ambient of 40°F ambient.
- **0:** Suitable for outdoor use to 0°F ambient. Includes low ambient fan speed controls with (LT) models.
- **M20:** Suitable for outdoor use to -20°F ambient. Includes low ambient fan speed controls with hot gas bypass. Internal wind baffles, optional.

¹ Flow Design (__=Portable, ST=Stationary, RF=Reverse Flow, EXCH=Extra Heat Exchanger, DP=Dual Pump, DR=Dual Return)

² Leaving Fluid Temperature (__=Standard, LT=Low Temperature-specify lowest temperature in °F)






³ Ambient Temperature Conditions (see above)

⁴ Electrical Power Code (see above)



TECHNICAL SPECIFICATION

WWW.WATERCHILLERS.COM

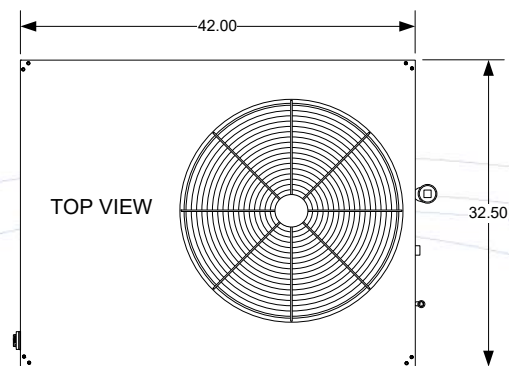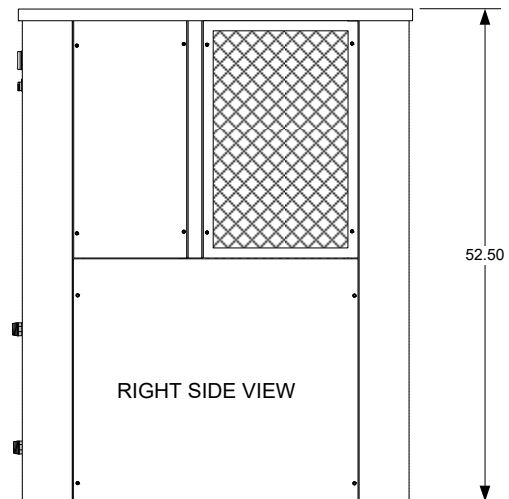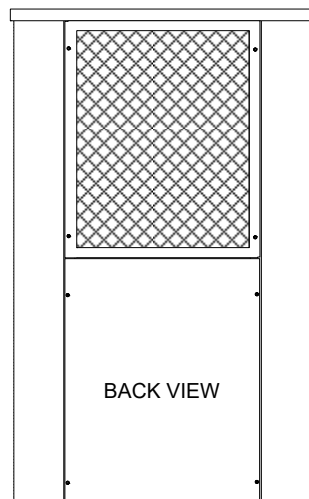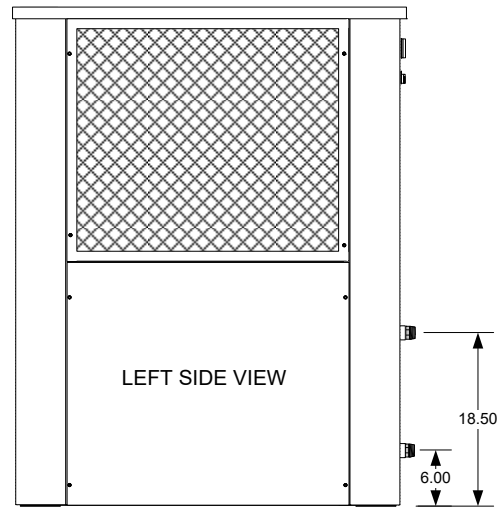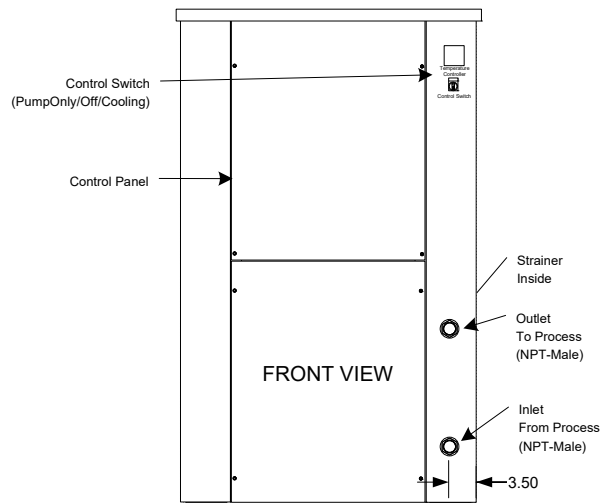

NOTES

- Unit should be installed with at least 2' clearance on all sides and a minimum of 5' clear air space above the unit
- Dimensions are approximate. (inches)
- Casters (Optional)
- All specifications subject to change without notice.

COLD SHOT CHILLERS

DRAWN ENGINEERING

ISSUED 6/22/2020

SIZE

A

DIMENSION NOTES

Dimensions are in inches
Unless otherwise specified, $\pm 1/4"$

SCALE NONE

DWG NO

INSTALLATION DRAWING
ACWC-036-Q- (Typical)

DWG-INST_ACWC-036-Q- (0520).vsd

REV

1


SHEET 3 / Front-Back-Top-Sides-Q-RF



TECHNICAL SPECIFICATION

WWW.WATERCHILLERS.COM

REVERSE FLOW (RF)

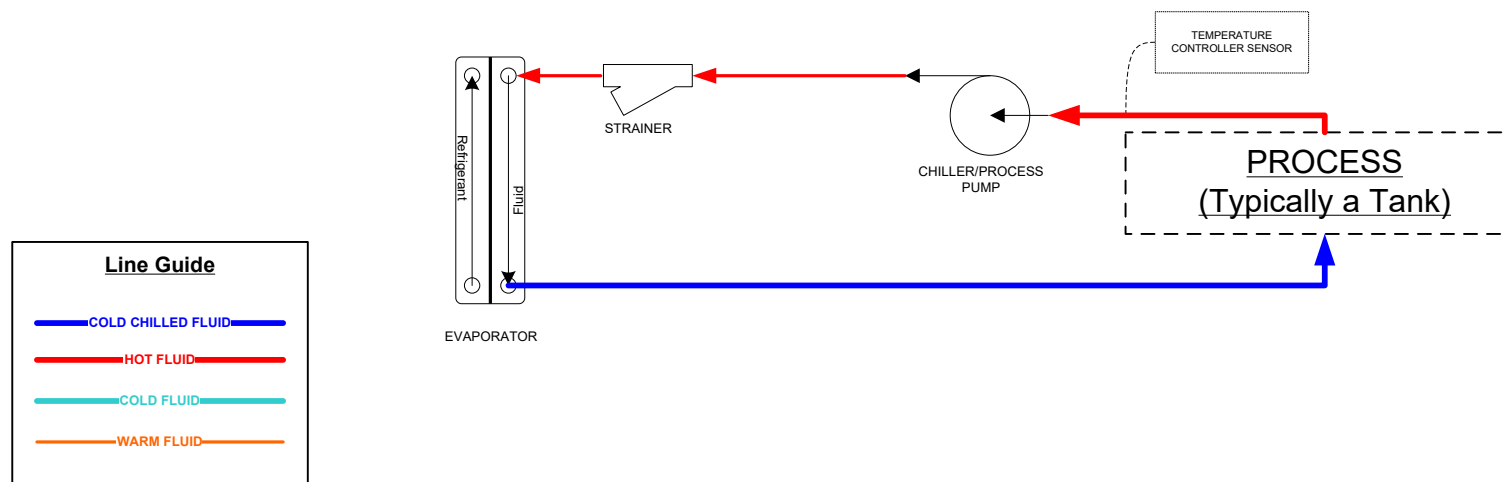

COLD SHOT CHILLERS

DRAWN ENGINEERING

ISSUED 5/2020

NOTES

- All designs are subject to change without notice.
- The diagrams are to be used as a basic flow diagram only.
- Color Code is for relative temperature comparison.
- Additional components may be included.
- Evaporator may be located in tank.

SIZE

A

DESCRIPTION

Typical FLOW OPTIONS for Chiller Circuits

REV

1

SCALE NONE

DWG-CKT_ChillerCircuitFlowOptions-Typical_(0520).vsd

SHEET 3 / Reverse Flow (RF)