



Model: ACWC-036-Q-ST¹-__²-__³-__⁴

Description:

Single stage air-cooled water chiller system. System capacity indicated on table is the approximate BTU/hr based on a leaving fluid temperature of 50°F with an ambient air temperature of 95°F.

CAPACITY ±5% AT 50° LCWT / 95°F AMBIENT		36,000 BTU /HR				
COMPRESSOR / REFRIGERANT		HERMETIC SCROLL / R410A				
CONDENSER FANS / AIRFLOW		1 / 2898 CFM				
CONDENSER COILS TYPE		COPPER TUBE / ALUMINUM FIN				
EVAPORATOR TYPE		STAINLESS STEEL / COPPER BRAZED				
FLUID CONNECTIONS		1" MNPT (IN/OUT)				
ELECTRICAL:	V - Ø - HZ	COMP RLA / LRA	FAN FLA	MCA	MOCP	
- 2	230 - 1 - 60	15.4	83.9	1.3	20.5	35
- 5	230 - 3 - 60	10.4	73	1.3	14.3	20
- 6	460 - 3 - 60	5.8	38	0.5	7.7	15
DIMENSIONS		42" L x 32 ½" W x 52 ½" H				
WEIGHT (APPROX.)		500 LBS				

Note: All specifications subject to change without notice. Specify voltage and ambient condition upon ordering.

MCA: Minimum circuit amps per UL 1995. MOCP: Maximum overcurrent protective device per UL 1995.

STANDARD FEATURES:

- **Controls:** Electronic programmed temperature controller with constant (set point & process) temperature readout.
- **Refrigeration Components:** Efficient scroll compressors, sight glass/moisture indicators, balanced port expansion valves, filter drier, pump down valves, fan cycling head pressure controls.
- **Process Fluid Components:** Bronze "Y" strainer with 20 mesh stainless steel screen.
- **Safety Controls:** High and low refrigerant pressure, high and low fluid temperature, freeze, low water flow, overloads for compressor and fan motors.
- **Construction:** Welded steel powder coated frame and full metal cabinet, copper piping connections.
- **Warranty:** One year parts / five year compressor.

SUITABLE AMBIENT CONDITIONS/FEATURES:

- **IND:** Indoor use only. Casters on frame.
- **40:** Suitable for outdoor use with an ambient of 40°F ambient.
- **0:** Suitable for outdoor use to 0°F ambient. Includes low ambient fan speed controls with (LT) models.
- **M20:** Suitable for outdoor use to -20°F ambient. Includes low ambient fan speed controls with hot gas bypass. Internal wind baffles, optional.

¹ Flow Design (__=Portable, ST=Stationary, RF=Reverse Flow, EXCH=Extra Heat Exchanger, DP=Dual Pump, DR=Dual Return)

² Leaving Fluid Temperature (__=Standard, LT=Low Temperature-specify lowest temperature in °F)






³ Ambient Temperature Conditions (see above)

⁴ Electrical Power Code (see above)



TECHNICAL SPECIFICATION

WWW.WATERCHILLERS.COM

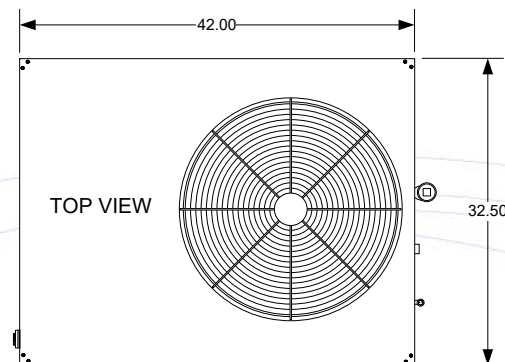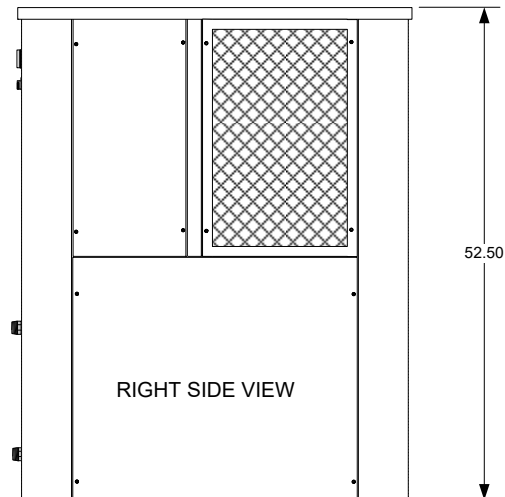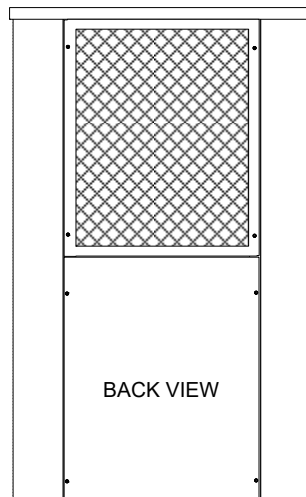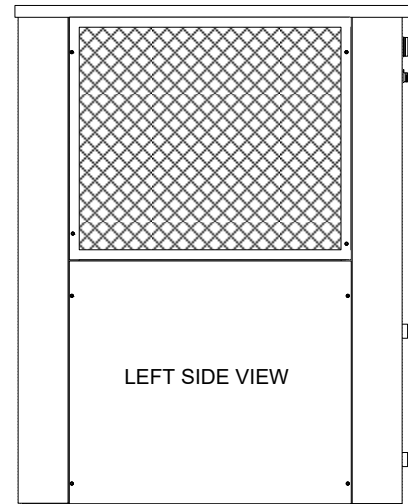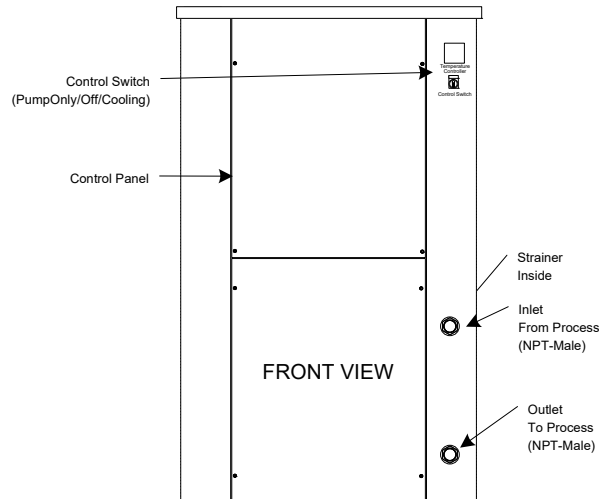

NOTES

- Unit should be installed with at least 2' clearance on all sides and a minimum of 5' clear air space above the unit
- Dimensions are approximate. (inches)
- Casters (Optional)
- All specifications subject to change without notice.

COLD SHOT CHILLERS

DRAWN ENGINEERING

ISSUED 5/28/2020

SIZE

A

DIMENSION NOTES

Dimensions are in inches
Unless otherwise specified. $\pm 1/4"$

DWG NO

INSTALLATION DRAWING
ACWC-036-Q- (Typical)

REV

1

SCALE

NONE


DWG-INST_ACWC-036-Q- (0520).vsd

SHEET

2 / Front-Back-Top-Sides-Q-ST



STATIONARY (ST)

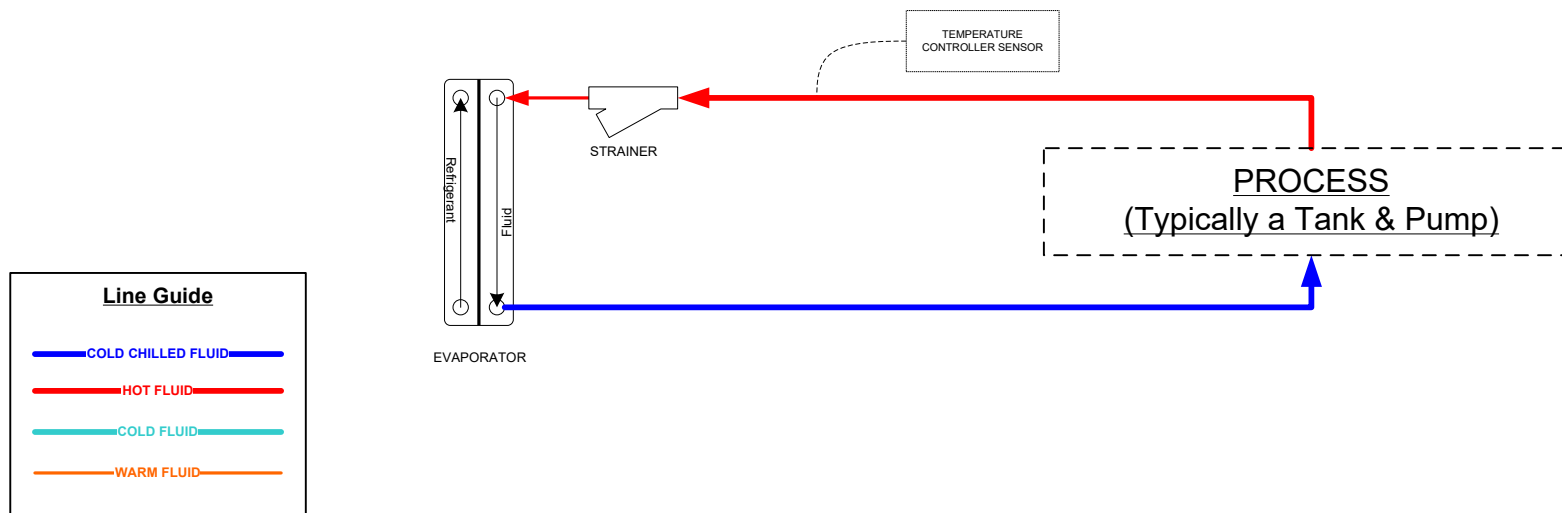

COLD SHOT CHILLERS

DRAWN

ENGINEERING

ISSUED

5/2020

SIZE

A

SCALE

NONE

NOTES

- All designs are subject to change without notice.
- The diagrams are to be used as a basic flow diagram only.
- Color Code is for relative temperature comparison.
- Additional components may be included.
- Evaporator may be located in tank.

DESCRIPTION

Typical FLOW OPTIONS for Chiller Circuits

REV

1

DWG-CKT_ChillerCircuitFlowOptions-Typical_(0520).vsd

SHEET

5 / Stationary (ST)