



MODEL: CSAC-018-C-ST¹-__²-__³-__⁴

DESCRIPTION:

Single refrigerant circuit / single stage air-cooled fluid chiller system setup.

CAPACITY		18,000 BTU /HR				
REFRIGERANT CIRCUIT(S)		1				
COMPRESSOR(S) / REFRIGERANT		HERMETIC SCROLL / R-454B				
CONDENSER FAN(S) / AIRFLOW		1 / 3147 CFM				
CONDENSER COILS TYPE		ALUMINUM MICROCHANNEL				
EVAPORATOR TYPE		STAINLESS STEEL / COPPER BRAZED PLATE				
FLUID CONNECTIONS		1" MNPT (IN/OUT)				
ELECTRICAL:		COMPRESSOR(S)		FAN		
	V - Ø - HZ	RLA	LRA	FLA	MCA	MOCP
- 2	230 - 1 - 60	16	87.5	3.0	23	35
- 5	230 - 3 - 60	12.8	95	3.0	19	30
- 6 ⁵	460 - 3 - 60	6.4	45	3.0	11.1	15
DIMENSIONS		45" L x 32.5" W x 62.3" H				
WEIGHT (APPROX.)		650 LBS				

STANDARD FEATURES:

- **Controls:** Electronic temperature controller with constant Set Point & Process Value temperature readout.
- **Refrigeration Components:** Efficient scroll compressors, sight glass/moisture indicators, balanced port thermal expansion valves, filter driers, service valves, condenser fan(s) are electronically commutated motors. (ECM)
- **Fluid Components:** Bronze "Y" strainers with 20 mesh stainless steel screen. All fluid components insulated.
- **Safety Controls:** High and low refrigerant pressures, high and low fluid temperatures, evaporator freeze condition, low water flow switch, thermal overloads for compressors.
- **Construction:** Welded steel powder coated frame and full metal cabinet, copper piping connections.
- **Warranty:** One-year parts / five-year compressor.

SUITABLE AMBIENT CONDITIONS/FEATURES: (see footnote 3)

- **IND:** Indoor use only. Casters on frame, Optional.
- **40:** Suitable for outdoor use with an ambient of 40°F ambient.
- **0:** Suitable for outdoor use to 0°F ambient.
- **M20:** Suitable for outdoor use to -20°F ambient.

Notes:

- System capacity indicated on table is the approximate BTU/hr based on a leaving fluid temperature of 50°F with an ambient air temperature of 95°F.
- All specifications subject to change without notice. Specify voltage and ambient condition upon ordering.
- MCA: Minimum circuit amps per UL 1995. MOCP: Maximum overcurrent protective device per UL 1995.

¹ Flow Design (__=Portable, ST=Stationary, RF=Reverse Flow, EXCH=Extra Heat Exchanger, DP/DM=Dual Pump Medical, DR=Dual Return)

² Leaving Fluid Temperature (__=Standard, LT=Low Temperature-specify lowest temperature in °F)

³ Ambient Temperature Conditions (see above)






⁴ Electrical Power Code (see above)

⁵ Unit will require a 4-wire electrical service with neutral. If only 3 phase 3 wire 480-volt service is available, please notify our sales/technical support staff for proper installation procedures.



TECHNICAL SPECIFICATION

WWW.WATERCHILLERS.COM

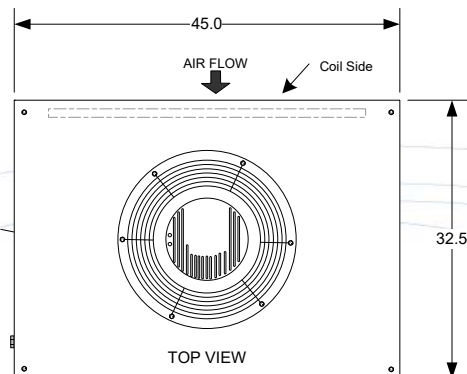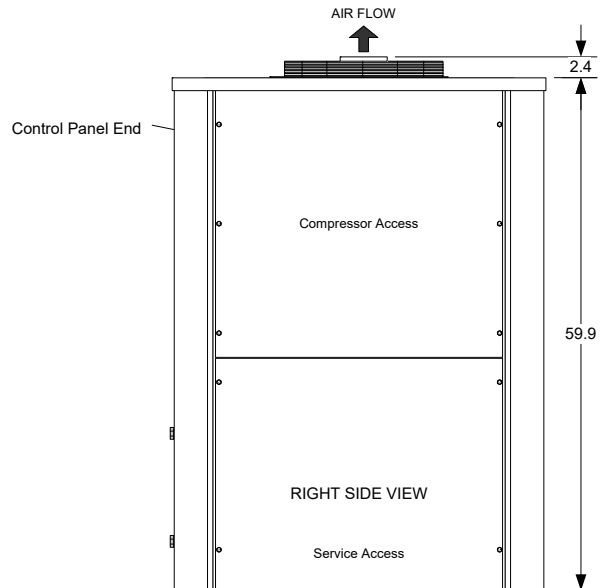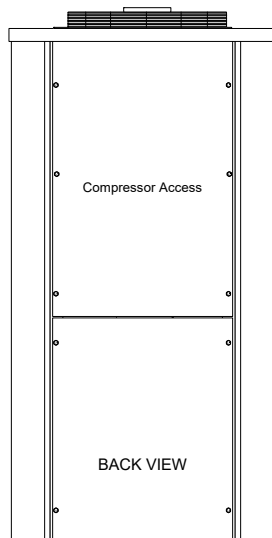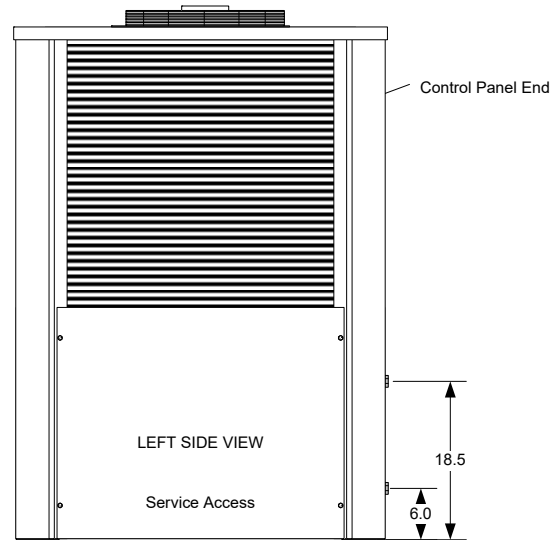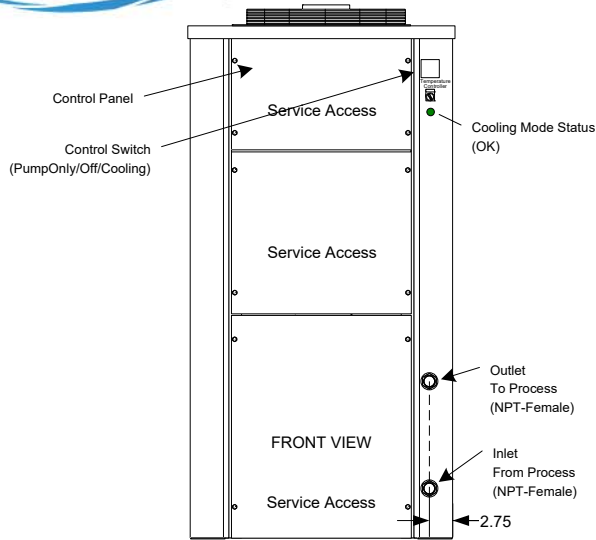

NOTES

- Unit should be installed with at least 2' clearance on all sides and a minimum of 5' clear air space above the unit
- Dimensions are approximate. (inches)
- Casters (Optional)
- All specifications subject to change without notice.

COLD SHOT CHILLERS

DRAWN ENGINEERING

ISSUED 2/21/2023

SIZE

A

DIMENSION NOTES

Dimensions are in inches
Unless otherwise specified, $\pm .1/4"$

DWG NO

INSTALLATION DRAWING
CSAC-018 to 060- (Typical)

REV

1


SCALE .535 in = 1 ft

DWG-INST_CSAC-018 to 060-_022023.vsd

SHEET 3 / Front-Back-Top-Side Views_ST



STATIONARY (ST)

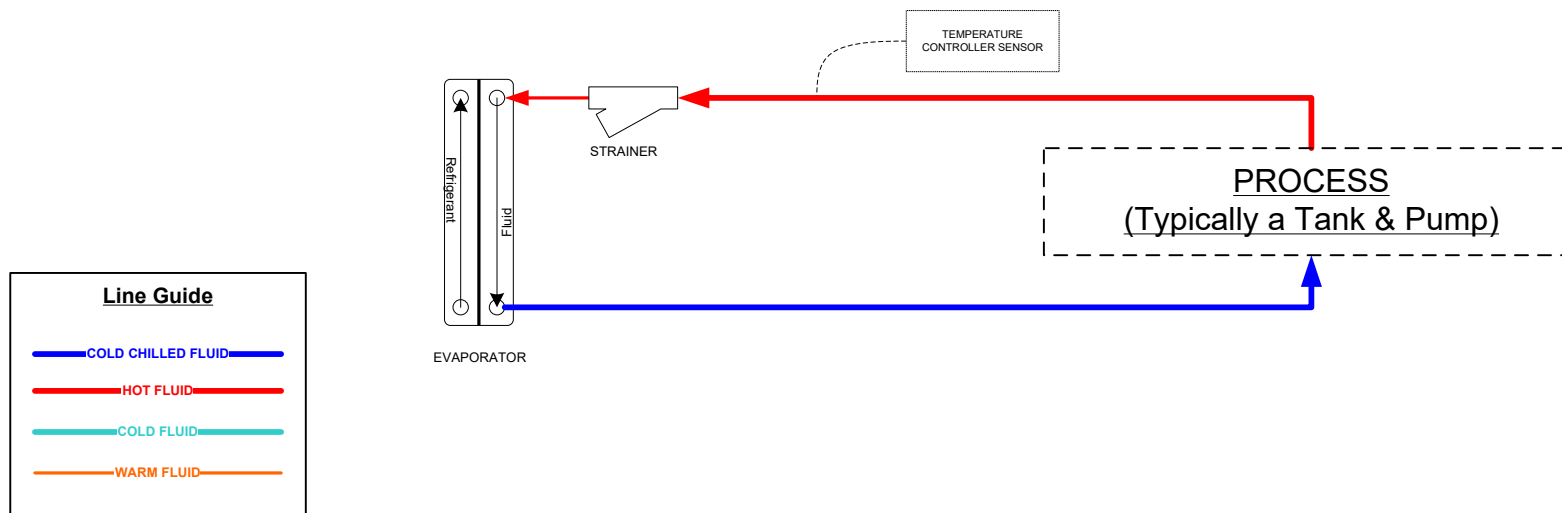

COLD SHOT CHILLERS

DRAWN ENGINEERING

ISSUED 5/2020

SIZE

A

SCALE NONE

NOTES

- All designs are subject to change without notice.
- The diagrams are to be used as a basic flow diagram only.
- Color Code is for relative temperature comparison.
- Additional components may be included.
- Evaporator may be located in tank.

DESCRIPTION

Typical FLOW OPTIONS for Chiller Circuits

REV

1

DWG-CKT_ChillerCircuitFlowOptions-Typical_(0520).vsd

SHEET 5 / Stationary (ST)